



陕西瀚瑞医疗科技有限公司
Shaanxi Hanrui Med-Tech Co.,Ltd.

地址：陕西省汉中市南郑区梁山工业园区

Address: Liangshan Industrial Park, Nanzheng District,
Hanzhong City, Shaanxi Province

电话/Phone: (+86)-0916-2513361

邮箱/Email: admin@rxjmttool.com
ruixinjmrjhz@126.com



中国制造网

Find us on Made-in-China.com



瀚瑞医疗官网

Scan to follow Hanrui



精工所至 全球信赖

Exquisite craftsmanship
Trusted globally



高精度 · 高耐磨 · 超锋利

High-Precision · High-Wear-Resistance · Ultra-Sharp

公司简介Company Profile

- 陕西瀚瑞医疗科技有限公司成立于2018年, 注册资本1000万元, 建筑面积8025平方米, 现有员工110余人。公司承袭“汉中锐鑫刀具”三十载精密制造基因, 专注于医用旋转工具及其加工设备的研发、生产与销售。
Shaanxi Hanrui Med-Tech Co., Ltd. was established in 2018, with a registered capital of 10 million yuan, a building area of 8,025 square meters, and more than 110 employees. Inheriting the 30-year precision manufacturing heritage of "Hanzhong Ruixin Cutting Tools", the company focuses on the R & D, production and sales of medical rotating tools and their processing equipment.
- 公司主营产品包括: **牙科钨钢车针; 牙科修整用钨钢车针; 口腔义齿修复磨头; 骨科、耳鼻喉科修整磨头; 医用旋转工具加工用五轴数控工具磨床; 首饰雕刻微钻; 美容美甲磨头等**。瀚瑞医疗牙科钨钢车针产品, 70%出口欧美等国。
The company's main products include: dental carbide burs; dental polishing/trimming burs; grinding heads for oral denture repair; trimming grinding heads for orthopedics and otolaryngology; five - axis CNC tool grinders for processing medical rotating tools; micro drills for jewelry engraving ; grinding heads for beauty and nail care, etc. 70% of Hanrui Medical's dental carbide burs are exported to Europe, America and other countries.
- 公司为**国家级高新技术企业**、陕西省“专精特新”中小企业。近年承担省市级重点技术研发、科技攻关项目4项, 累计研发投入超800万元, 获得国家实用新型专利12项, 申请发明专利2项。公司已建立符合医疗器械生产质量管理规范(GMP)的完整体系, 并通过ISO 9001质量管理体系认证和ISO 13485医疗器械质量管理体系认证。
The company is a national high - tech enterprise, and a "specialized, refined, characteristic and innovative" small and medium-sized enterprises in Shaanxi Province. In recent years, it has undertaken 4 key provincial and municipal technology research and development and scientific and technological research projects, with a cumulative R & D investment of over 8 million yuan. It has obtained 12 national utility model patents and applied for 2 invention patents. The company has established a complete system in line with the Good Manufacturing Practice (GMP) for medical device production, and has passed ISO 9001 quality management system certification and ISO 13485 medical device quality management system certification.
- 公司秉持“**以人为本、真诚服务、共求发展**”的经营理念, 以求实进取、创新卓越为态度, 倡导专业、创新、高效的企业精神, 并建立共享的价值分配准则。公司以持续为社会创造最大价值、为全球客户提供高效安全的医用旋转工具及专业技术服务为使命。
Guided by the philosophy of “People-Oriented, Sincere Service, and Mutual Development,” Hanrui Med-Tech strives for practicality, innovation, and excellence. It promotes a corporate culture of professionalism, innovation, and efficiency, alongside a value-sharing principle. The company is committed to creating sustainable value for society and providing global clients with efficient, safe medical rotary tools and professional technical services.



产品目录

CONTENT



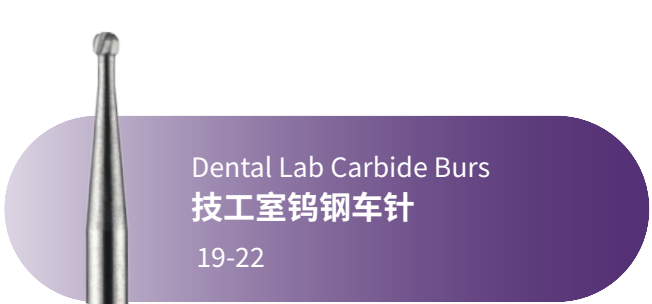


Illustration of Bur Shank, Order No. and ISO No.

车针杆部示意、货号及ISO编码


序号 No.	杆型代码 Shank Code	示意图 Diagram	杆径/mm Shank Diameter /mm	杆型编码 Shank Coding	建议转速/rpm Recommended Speed /rpm
1	FGS		1.6	313	120000-3000000
2	FG		1.6	314	120000-3000000
3	FGL		1.6	315	120000-3000000
4	FGLA		1.6	351	120000-3000000
5	FGLB		1.6	352	120000-3000000
6	FGSL		1.6	316	120000-3000000
7	FGSLA		1.6	317	120000-3000000
8	FGSLB		1.6	318	120000-3000000
9	FGSLC		1.6	319	120000-3000000
10	RAS		2.35	203	500-30000
11	RA		2.35	204	500-30000
12	RASL		2.35	205	500-30000
13	RAXL		2.35	206	500-30000
14	HPS		2.35	103	6000-50000
15	HP		2.35	104	6000-50000
16	HPA		2.35	151	6000-50000
17	HPB		2.35	152	6000-50000
18	HPL		2.35	105	6000-50000

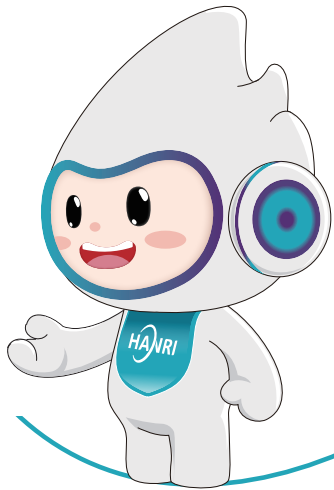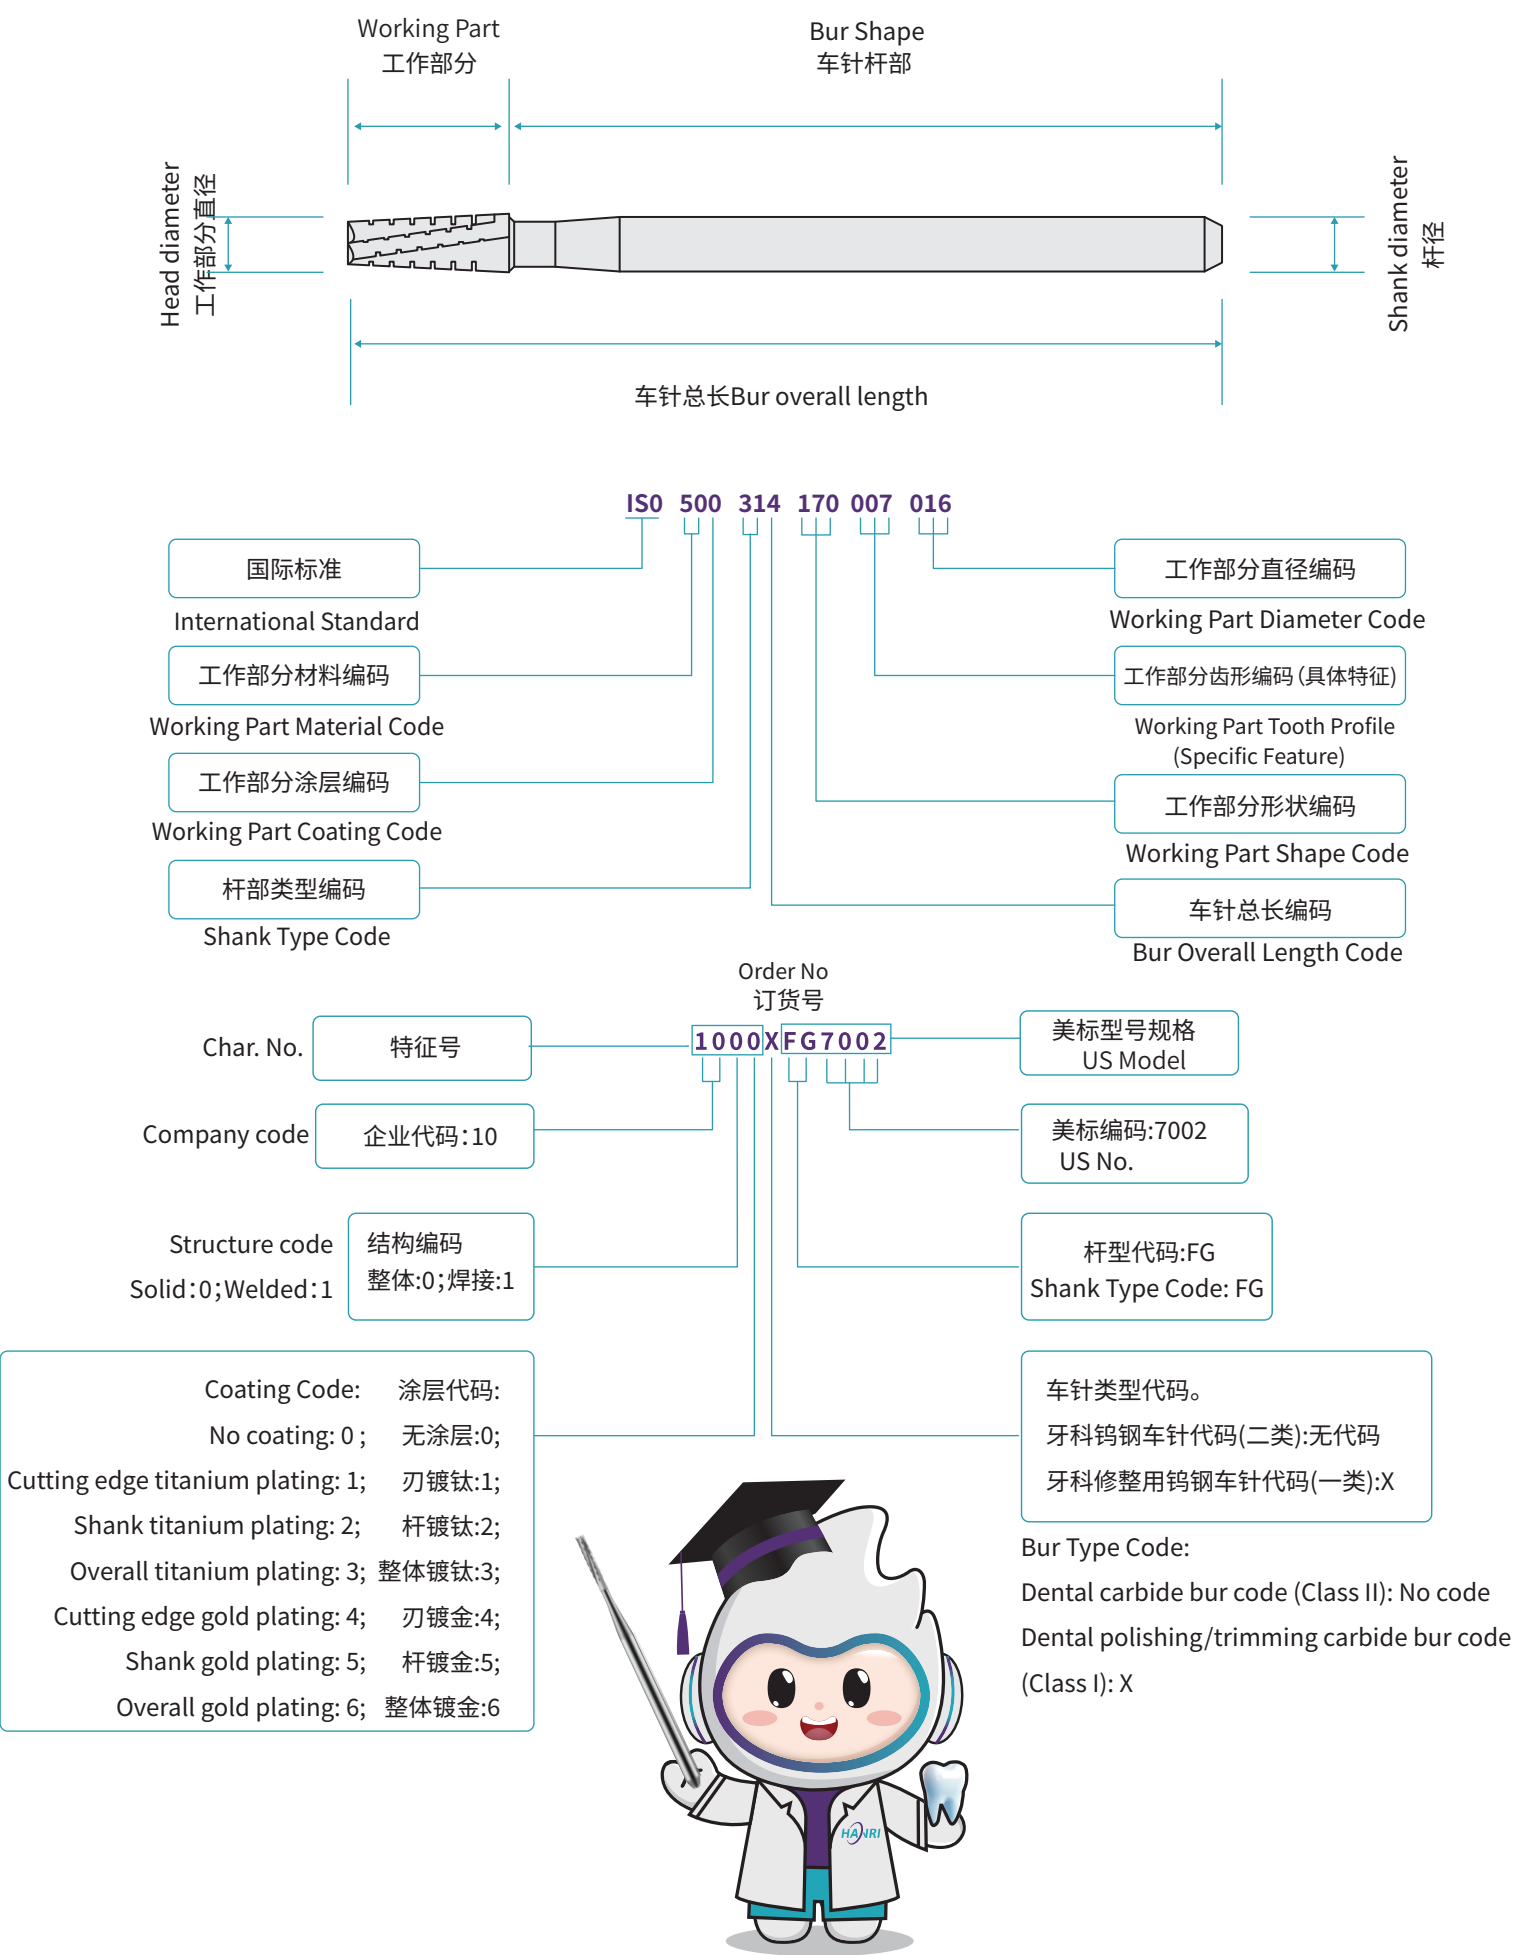

Cutter shank reference, Order No. and ISO No.

磨头杆部示意、货号及ISO编码


ISO编码 ISO Code

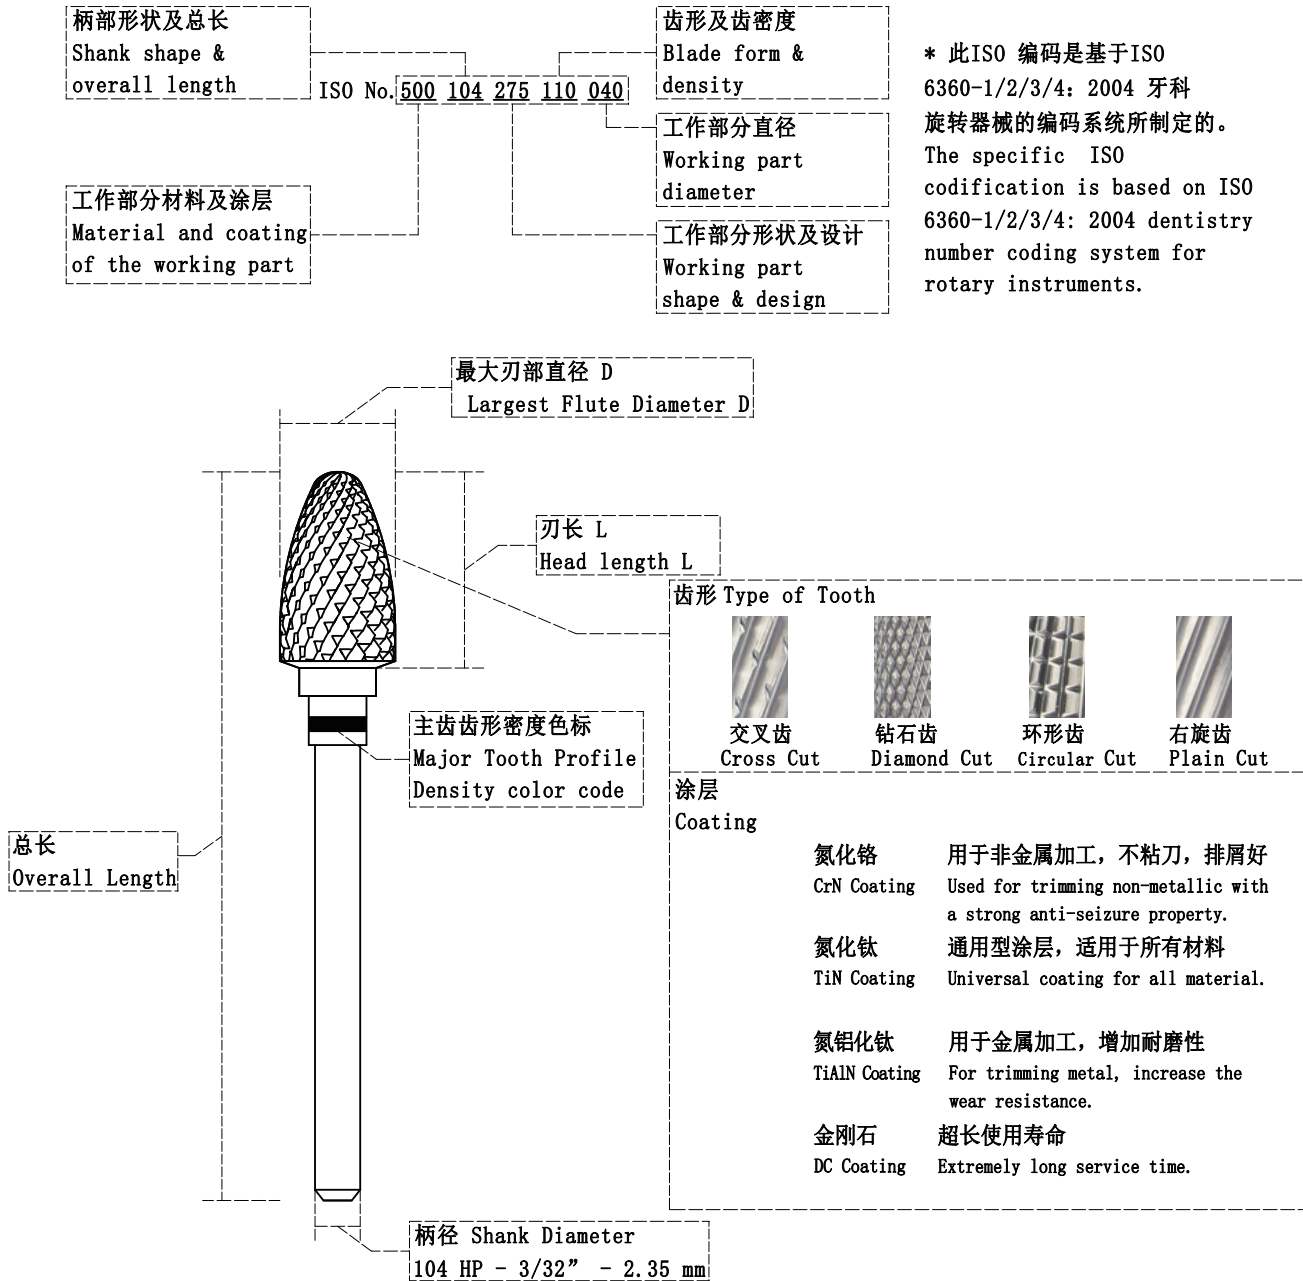

主齿密度 Main tooth density	代码 Code	色标颜色 Color code	齿形 Type of Tooth	代码 Code
超细密度 Super Fine	VF	黄色 Yellow	交叉齿 Cross Cut	X
细密度 Fine	F	红色 Red	环形齿 Circular Cut	L
标准密度 Standard	M	蓝色 Blue	钻石齿 Diamond Cut	ST
粗密度 Coarse	C	绿色 Green		
超粗密度 Super Coarse	VC	黑色 Black		

订货号说明 Order Instruction

出厂货号(Order No.)

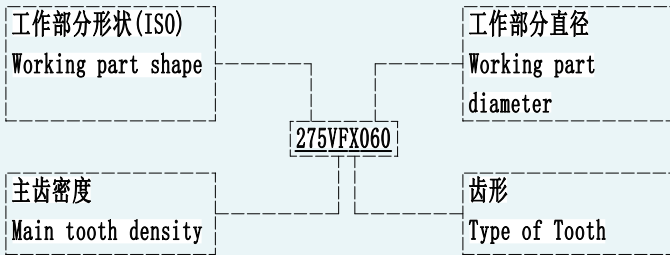

* 该货号均无涂层工艺, 若需涂层工艺可备注单独说明。

This Order No. does not have a coating process. If a coating process is required, it can be noted separately.

齿形 Tooth shape	推荐转速 recommended speed		使用推荐 usage recommendation	
超细密度 (VF) ISO102 Ultra - fine density	D≤2.3mm D≥4.0mm	30000rpm 20000—35000rpm	牙冠及齿桥技术 模型铸造技术	crown and bridge technology model casting technology
细密度 (F) ISO133 Fine density	D≤2.3mm D≥4.0mm	30000rpm 20000—25000rpm	牙冠及齿桥技术 模型铸造技术	crown and bridge technology model casting technology
标准密度 (M) ISO175 Standard density	D≤4.5mm D≥5.0mm	30000rpm 15000—25000rpm	牙冠及齿桥技术 模型铸造技术 模型制作 丙烯酸树脂技术	crown and bridge technology model casting technology model making acrylic resin technology
粗密度 (C) ISO215 Coarse density	D≤4.5mm D≥5.0mm	15000—25000rpm 10000—20000rpm	模型制作 丙烯酸树脂技术	model making acrylic resin technology
超粗密度(VC) ISO222 Ultra-coarse density		10000—20000rpm	模型制作 丙烯酸树脂技术	model making acrylic resin technology
超细密度 (VFX) ISO110 Ultra - fine density	D≤2.3mm D > 2.5mm	30000rpm 20000—35000rpm	牙冠及齿桥技术 模型铸造技术 丙烯酸树脂技术	crown and bridge technology model casting technology acrylic resin technology
细密度 (FX) ISO140 Fine density	D≤2.3mm D > 2.5mm D=6.0mm	25000—40000rpm 20000—35000rpm 15000—30000rpm	牙冠及齿桥技术 模型铸造技术 模型制作 丙烯酸树脂技术	crown and bridge technology model casting technology model making acrylic resin technology
标准密度 (MX) ISO190 Standard density	D≤2.3mm D≥2.5mm D≥5.0mm	25000—40000rpm 20000—35000rpm 15000—30000rpm	牙冠及齿桥技术 模型铸造技术 模型制作 丙烯酸树脂技术	crown and bridge technology model casting technology model making acrylic resin technology
粗密度 (CX) ISO220 Coarse density	D≤4.5mm D≥5.0mm	15000—25000rpm 10000—20000rpm	模型制作 丙烯酸树脂技术	model making acrylic resin technology
超粗密度(VCX) ISO223 Ultra-coarse density		10000—20000rpm	模型制作 丙烯酸树脂技术	model making acrylic resin technology
直刃环形齿 (ML) ISO176 Straight - edged annular tooth	D≤2.3mm D > 2.5mm D≥6.0mm	30000rpm 15000—25000rpm 10000—20000rpm	模型制作 丙烯酸树脂技术	model making acrylic resin technology
左旋标准交叉齿 (LRMX) ISO194 Left - handed standard cross tooth	D≤2.3mm D≥4.0mm	25000—40000rpm 20000—35000rpm	牙冠及齿桥技术 模型铸造技术	crown and bridge technology model casting technology
细密度钻石齿 (FST) ISO141 Fine - density diamond tooth	D≤2.3mm D≥4.5mm	30000rpm 15000rpm	牙冠及齿桥技术	crown and bridge technology
标准密度钻石齿 (MST) ISO191 Standard - density diamond tooth	D≤2.3mm D≥4.5mm	30000rpm 15000rpm	牙冠及齿桥技术	crown and bridge technology
三棱锥 (TP) ISO211 Triangular		10000—15000rpm	丙烯酸树脂技术	acrylic resin technology
四棱锥 (QP) ISO211 Quadrilateral pyramid		10000—15000rpm	丙烯酸树脂技术	acrylic resin technology
细密度右旋标准环形齿 (FL) ISO137 Fine - density right - handed standard annular tooth	D≤2.3mm D≥2.5mm D≥6.0mm	25000—40000rpm 25000rpm 20000rpm	牙冠及齿桥技术 模型铸造技术 丙烯酸树脂技术	crown and bridge technology model casting technology acrylic resin technology
细密度右旋超细环形齿 (FFL) ISO134 Fine - density left - handed super annular tooth	D≤2.3mm D≥2.5mm D≥5.0mm	30000rpm 25000rpm 20000rpm	牙冠及齿桥技术 模型铸造技术 丙烯酸树脂技术	crown and bridge technology model casting technology acrylic resin technology

Extraction Burs

拔牙车针

截锥裂沟形 (H33L)

Taper Flat End Fissure

5支/板 5pcs/pack



型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
截锥裂沟形012	FGSL701L	1100FGSL701L	500 316 171 008 012	1.2	6.0	1.6	25
截锥裂沟形012	FGSLA701L	1100FGSLA701L	500 317 171 008 012	1.2	6.0	1.6	28
截锥裂沟形012	FGSLC701L	1100FGSLC701L	500 319 171 008 012	1.2	6.0	1.6	32
截锥裂沟形016	FGSL702L	1100FGSL702L	500 316 171 008 016	1.6	6.0	1.6	25
截锥裂沟形016	FGSLA702L	1100FGSLA702L	500 317 171 008 016	1.6	6.0	1.6	28
截锥裂沟形016	FGSLC702L	1100FGSLC702L	500 319 171 008 016	1.6	6.0	1.6	32


Crown-cutting Burs

破冠车针

梨形 (H7)

Pear

5支/板 5pcs/pack



型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
梨形010	FG1931	1005FG1931	500 314 237 008 010	1.0	2.0	1.6	19
梨形012	FG1932	1005FG1932	500 314 237 008 012	1.2	2.0	1.6	19


圆柱半球裂沟形 (H31R)

Straight Round End Fissure

5支/板 5pcs/pack




型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
圆柱半球裂沟形010	FG1957	1005FG1957	500 314 139 008 010	1.0	4.2	1.6	19
圆柱半球裂沟形012	FG1958	1005FG1958	500 314 139 008 012	1.2	4.2	1.6	19



弧形齿背设计

Arc-Shaped Tooth Back Design

更锋利 更持久的切削性能
Sharper and Longer-lasting Cutting Performance



微米晶材质

Micron-crystalline Material

极高的强度和断裂韧性
Extremely High Strength and Fracture Toughness



智能磨削系统

Intelligent Grinding System

实现微米级精度控制
Achieve Micron-level Precision Control

Standard Burs

标准车针

高速球形 (H1) High-speed Round 5支/板 5pcs/pack							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
球形 008	FGS1	1000FGS1	500 313 001 006 008	0.8	0.64	1.6	16.5
球形 010	FGS2	1000FGS2	500 313 001 006 010	1.0	0.8	1.6	16.5
球形 012	FGS3	1000FGS3	500 313 001 006 012	1.2	1.0	1.6	16.5
球形 014	FGS4	1000FGS4	500 313 001 006 014	1.4	1.2	1.6	16.5
球形 016	FGS5	1000FGS5	500 313 001 006 016	1.6	1.4	1.6	16.5
球形 005	FG1/4	1000FG1/4	500 314 001 006 005	0.5	0.4	1.6	19
球形 006	FG1/2	1000FG1/2	500 314 001 006 006	0.6	0.5	1.6	19
球形 008	FG1	1000FG1	500 314 001 006 008	0.8	0.64	1.6	19
球形 010	FG2	1000FG2	500 314 001 006 010	1.0	0.8	1.6	19
球形 012	FG3	1000FG3	500 314 001 006 012	1.2	1.0	1.6	19
球形 014	FG4	1000FG4	500 314 001 006 014	1.4	1.2	1.6	19
球形 016	FG5	1000FG5	500 314 001 006 016	1.6	1.4	1.6	19
球形 018	FG6	1010FG6	500 314 001 006 018	1.8	1.5	1.6	19
球形 021	FG7	1010FG7	500 314 001 006 021	2.1	1.8	1.6	19
球形 023	FG8	1010FG8	500 314 001 006 023	2.3	1.9	1.6	19
球形 025	FG9	1010FG9	500 314 001 006 025	2.5	2.2	1.6	19

Standard Burs

标准车针

球形 008	FGSL1	1000FGSL1	500 316 001 006 008	0.8	0.64	1.6	25
球形 010	FGSL2	1000FGSL2	500 316 001 006 010	1.0	0.8	1.6	25
球形 012	FGSL3	1000FGSL3	500 316 001 006 012	1.2	1.0	1.6	25
球形 014	FGSL4	1000FGSL4	500 316 001 006 014	1.4	1.2	1.6	25
球形 016	FGSL5	1000FGSL5	500 316 001 006 016	1.6	1.4	1.6	25
球形 018	FGSL6	1010FGSL6	500 316 001 006 018	1.8	1.5	1.6	25
球形 021	FGSL7	1010FGSL7	500 316 001 006 021	2.1	1.8	1.6	25
球形 023	FGSL8	1010FGSL8	500 316 001 006 023	2.3	1.9	1.6	25
球形 025	FGSL9	1010FGSL9	500 316 001 006 025	2.5	2.2	1.6	25

低速弯机球形 (H1) Low-speed Right Angle Round 5支/板 5pcs/pack							
型号规格 Model	美标型号规格 USModel	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
球形 005	RA1/4	1010RA1/4	500 204 001 006 005	0.5	0.4	2.35	22
球形 006	RA1/2	1010RA1/2	500 204 001 006 006	0.6	0.5	2.35	22
球形 008	RA1	1010RA1	500 204 001 006 008	0.8	0.64	2.35	22
球形 010	RA2	1010RA2	500 204 001 006 010	1.0	0.8	2.35	22
球形 012	RA3	1010RA3	500 204 001 006 012	1.2	1.0	2.35	22
球形 014	RA4	1010RA4	500 204 001 006 014	1.4	1.2	2.35	22

Standard Burs

标准车针

球形 016	RA5	1010RA5	500 204 001 006 016	1.6	1.4	2.35	22
球形 018	RA6	1010RA6	500 204 001 006 018	1.8	1.5	2.35	22
球形 021	RA7	1010RA7	500 204 001 006 021	2.1	1.8	2.35	22
球形 023	RA8	1010RA8	500 204 001 006 023	2.3	1.9	2.35	22
球形 025	RA9	1010RA9	500 204 001 006 025	2.5	2.2	2.35	22
球形 008	RASL1	1010RASL1	500 205 001 006 008	0.8	0.64	2.35	26
球形 010	RASL2	1010RASL2	500 205 001 006 010	1.0	0.8	2.35	26
球形 012	RASL3	1010RASL3	500 205 001 006 012	1.2	1.0	2.35	26
球形 014	RASL4	1010RASL4	500 205 001 006 014	1.4	1.2	2.35	26
球形 016	RASL5	1010RASL5	500 205 001 006 016	1.6	1.4	2.35	26
球形 018	RASL6	1010RASL6	500 205 001 006 018	1.8	1.5	2.35	26
球形 021	RASL7	1010RASL7	500 205 001 006 021	2.1	1.8	2.35	26
球形 023	RASL8	1010RASL8	500 205 001 006 023	2.3	1.9	2.35	26
球形 025	RASL9	1010RASL9	500 205 001 006 025	2.5	2.2	2.35	26

高速倒截锥形 (H2) High-speed Inverted Cone 5支/板 5pcs/pack 							
型号规格 Model	美标型号规格 USModel	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
倒截锥形 006	FGS33 1/2	1000FGS33 1/2	500 313 011 006 006	0.6	0.55	1.6	16.5
倒截锥形 008	FGS34	1000FGS34	500 313 011 006 008	0.8	0.7	1.6	16.5

Standard Burs

标准车针

倒截锥形 010	FGS35	1000FGS35	500 313 011 006 010	1.0	0.9	1.6	16.5
倒截锥形 012	FGS36	1000FGS36	500 313 011 006 012	1.2	1.1	1.6	16.5
倒截锥形 014	FGS37	1000FGS37	500 313 011 006 014	1.4	1.2	1.6	16.5
倒截锥形 006	FG 33 1/2	1000FG 33 1/2	500 314 011 006 006	0.6	0.55	1.6	19
倒截锥形 008	FG 34	1000FG 34	500 314 011 006 008	0.8	0.7	1.6	19
倒截锥形 010	FG 35	1000FG 35	500 314 011 006 010	1.0	0.9	1.6	19
倒截锥形 012	FG 36	1000FG 36	500 314 011 006 012	1.2	1.1	1.6	19
倒截锥形 014	FG 37	1000FG 37	500 314 011 006 014	1.4	1.2	1.6	19
倒截锥形 016	FG 38	1000FG 38	500 314 011 006 016	1.6	1.4	1.6	19
倒截锥形 008	FGSL34	1000FGSL34	500 316 011 006 008	0.8	0.7	1.6	25
倒截锥形 010	FGSL35	1000FGSL35	500 316 011 006 010	1.0	0.9	1.6	25

低速弯机倒截锥形 Low-speed Right Angle Inverted Cone 5支/板 5pcs/pack 							
型号规格 Model	美标型号规格 USModel	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
倒截锥形 006	RA331/2	1010RA331/2	500 204 011 006 006	0.6	0.55	2.35	22
倒截锥形 008	RA34	1010RA34	500 204 011 006 008	0.8	0.7	2.35	22
倒截锥形 010	RA35	1010RA35	500 204 011 006 010	1.0	0.9	2.35	22
倒截锥形 012	RA36	1010RA36	500 204 011 006 012	1.2	1.1	2.35	22
倒截锥形 014	RA37	1010RA37	500 204 011 006 014	1.4	1.2	2.35	22

Standard Burs

标准车针

倒截锥形 016	RA38	1010RA38	500 204 011 006 016	1.6	1.4	2.35	22
倒截锥形 018	RA39	1010RA39	500 204 011 006 018	1.8	1.7	2.35	22
倒截锥形 021	RA40	1010RA40	500 204 011 006 021	2.1	2.0	2.35	22
倒截锥形 023	RA41	1010RA41	500 204 011 006 023	2.3	2.1	2.35	22

高速圆柱裂沟形 (H21) High-speed Straight Fissure 5支/板 5pcs/pack							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
圆柱裂沟形 009	FGS56	1000FGS56	500 313 109 006 009	0.9	3.8	1.6	16.5
圆柱裂沟形 010	FGS57	1000FGS57	500 313 109 006 010	1.0	4.1	1.6	16.5
圆柱裂沟形 008	FG55	1000FG55	500 314 108 006 008	0.8	3.5	1.6	19
圆柱裂沟形 009	FG56	1000FG56	500 314 109 006 009	0.9	3.8	1.6	19
圆柱裂沟形 010	FG57	1000FG57	500 314 109 006 010	1.0	4.1	1.6	19
圆柱裂沟形 012	FG58	1000FG58	500 314 109 006 012	1.2	4.1	1.6	19
圆柱裂沟形 014	FG59	1000FG59	500 314 109 006 014	1.4	4.5	1.6	19
圆柱裂沟形 016	FG60	1000FG60	500 314 109 006 016	1.6	4.5	1.6	19
圆柱裂沟形 010	FGSL57	1000FGSL57	500 316 109 006 010	1.0	4.1	1.6	25
圆柱裂沟形 012	FGSL58	1000FGSL58	500 316 109 006 012	1.2	4.1	1.6	25
圆柱裂沟形 014	FGSL59	1000FGSL59	500 316 109 006 014	1.4	4.5	1.6	25
圆柱裂沟形 016	FGSL60	1000FGSL60	500 316 109 006 016	1.6	4.5	1.6	25

Standard Burs

标准车针

低速圆柱裂沟形 (H21) Low-speed Straight Fissure 5支/板 5pcs/pack							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
圆柱裂沟形 009	RA56	1010RA56	500 204 109 006 009	0.9	3.8	2.35	22
圆柱裂沟形 010	RA57	1010RA57	500 204 109 006 010	1.0	4.1	2.35	22
圆柱裂沟形 012	RA58	1010RA58	500 204 109 006 012	1.2	4.1	2.35	22
圆柱裂沟形 014	RA59	1010RA59	500 204 109 006 014	1.4	4.5	2.35	22
圆柱裂沟形 016	RA60	1010RA60	500 204 109 006 016	1.6	4.5	2.35	22
圆柱裂沟形 018	RA61	1010RA61	500 204 109 006 018	1.8	4.8	2.35	22

高速圆柱裂沟形 (H31) High-speed Straight Fissure (带横切刃) Transverse Cutting Edge 5支/板 5pcs/pack							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
圆柱裂沟形008	FGS555	1000FGS555	500 313 108 007 008	0.8	3.5	1.6	16.5
圆柱裂沟形009	FGS556	1000FGS556	500 313 109 007 009	0.9	3.8	1.6	16.5
圆柱裂沟形010	FGS557	1000FGS557	500 313 109 007 010	1.0	4.1	1.6	16.5
圆柱裂沟形012	FGS558	1000FGS558	500 313 109 007 012	1.2	4.1	1.6	16.5
圆柱裂沟形014	FGS559	1000FGS559	500 313 109 007 014	1.4	4.5	1.6	16.5
圆柱裂沟形016	FGS560	1000FGS560	500 313 109 007 016	1.6	4.5	1.6	16.5

Standard Burs

标准车针

低速弯机圆柱裂沟形 (H31) Low-speed Right Angle Straight Fissure (带横切刃) Transverse Cutting Edge 5支/板 5pcs/pack 							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
圆柱裂沟形008	RA555	1010RA555	500 204 108 007 008	0.8	3.5	2.35	22
圆柱裂沟形009	RA556	1010RA556	500 204 109 007 009	0.9	3.8	2.35	22
圆柱裂沟形010	RA557	1010RA557	500 204 109 007 010	1.0	4.1	2.35	22
圆柱裂沟形012	RA558	1010RA558	500 204 109 007 012	1.2	4.1	2.35	22
圆柱裂沟形014	RA559	1010RA559	500 204 109 007 014	1.4	4.5	2.35	22
圆柱裂沟形016	RA560	1010RA560	500 204 109 007 016	1.6	4.5	2.35	22

低速弯机梨形 (H7) Low-speed Right Angle Pear 5支/板 5pcs/pack 							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
梨形 006	RA329	1010RA329	500 204 237 006 006	0.6	1.3	2.35	22
梨形 008	RA330	1010RA330	500 204 237 006 008	0.8	1.7	2.35	22
梨形 010	RA331	1010RA331	500 204 237 006 010	1.0	1.8	2.35	22
梨形 012	RA332	1010RA332	500 204 237 006 012	1.2	1.8	2.35	22
梨形 014	RA333	1010RA333	500 204 237 006 014	1.4	2.0	2.35	22

Standard Burs

标准车针

高速梨形 (H7) High-speed Pear 5支/板 5pcs/pack 							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
梨形 006	FGS329	1000FGS329	500 313 237 006 006	0.6	1.3	1.6	16.5
梨形 008	FGS330	1000FGS330	500 313 237 006 008	0.8	1.7	1.6	16.5
梨形 010	FGS331	1000FGS331	500 313 237 006 010	1.0	1.8	1.6	16.5
梨形 012	FGS332	1000FGS332	500 313 237 006 012	1.2	1.8	1.6	16.5
梨形 006	FG329	1000FG329	500 314 237 006 006	0.6	1.3	1.6	19
梨形 008	FG330	1000FG330	500 314 237 006 008	0.8	1.7	1.6	19
梨形 010	FG331	1000FG331	500 314 237 006 010	1.0	1.8	1.6	19
梨形 012	FG332	1000FG332	500 314 237 006 012	1.2	1.8	1.6	19
梨形 014	FG333	1000FG333	500 314 237 006 014	1.4	2.0	1.6	19

低速弯机长梨形 (H7L) Low-speed Right Angle Long-pear 5支/板 5pcs/pack 							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
梨形 008	RA330L	1010RA330L	500 204 238 006 008	0.8	2.8	2.35	22
梨形 010	RA331L	1010RA331L	500 204 238 006 010	1.0	4.0	2.35	22
梨形 012	RA332L	1010RA332L	500 204 238 006 012	1.2	4.0	2.35	22

Standard Burs

标准车针

高速梨形 (H245) High-speed Pear 5支/板 5pcs/pack							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
梨形 009	FGS245	1000FGS245	500 313 234 006 009	0.9	3.0	1.6	16.5
梨形 009	FG245	1000FG245	500 314 234 006 009	0.9	3.0	1.6	19

高速圆柱半球裂沟形 (H21R) High-speed Straight fissure 5支/板 5pcs/pack							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
圆柱半球裂沟形010	FGS1157	1000FGS1157	500 313 139 006 010	1.0	4.1	1.6	16.5
圆柱半球裂沟形09	FG1156	1000FG1156	500 314 139 006 009	0.9	3.8	1.6	19
圆柱半球裂沟形010	FG1157	1000FG1157	500 314 139 006 010	1.0	4.1	1.6	19
圆柱半球裂沟形012	FG1158	1000FG1158	500 314 139 006 012	1.2	4.1	1.6	19
圆柱半球裂沟形010	FGSL1157	1000FGSL1157	500 316 139 006 010	1.0	4.1	1.6	25
圆柱半球裂沟形012	FGSL1158	1000FGSL1158	500 316 139 006 012	1.2	4.1	1.6	25

高速圆柱半球裂沟形 (H31R) High-speed Straight fissure (带横切刃) Transverse Cutting Edge 5支/板 5pcs/pack							
型号规格 Model	美标型号规格 USModel	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
圆柱半球裂沟形009	FG1556	1000FG1556	500 314 139 007 009	0.9	3.8	1.6	19

Standard Burs

标准车针

圆柱半球裂沟形010	FG1557	1000FG1557	500 314 139 007 010	1.0	4.1	1.6	19
圆柱半球裂沟形012	FG1558	1000FG1558	500 314 139 007 012	1.2	4.1	1.6	19
圆柱半球裂沟形010	FGSL1557	1000FGSL1557	500 316 139 007 010	1.0	4.1	1.6	25
圆柱半球裂沟形012	FGSL1558	1000FGSL1558	500 316 139 007 012	1.2	4.1	1.6	25

低速弯机圆柱半球裂沟形 (H31R) Low-speed Right Angle Straight fissure (带横切刃) Transverse Cutting Edge 5支/板 5pcs/pack							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
圆柱半球裂沟形009	RA1556	1010RA1556	500 204 139 007 009	0.9	3.8	2.35	22
圆柱半球裂沟形010	RA1557	1010RA1557	500 204 139 007 010	1.0	4.1	2.35	22
圆柱半球裂沟形012	RA1558	1010RA1558	500 204 139 007 012	1.2	4.1	2.35	22
圆柱半球裂沟形009	RASL1556	1010RASL1556	500 205 139 007 009	0.9	3.8	2.35	26
圆柱半球裂沟形010	RASL1557	1010RASL1557	500 205 139 007 010	1.0	4.1	2.35	26
圆柱半球裂沟形012	RASL1558	1010RASL1558	500 205 139 007 012	1.2	4.1	2.35	26

高速截锥裂沟形 (H23) High-speed Taper Flat End Fissure 5支/板 5pcs/pack							
型号规格 Model	美标型号规格 USModel	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
截锥裂沟形009	FG169	1000FG169	500 314 170 006 009	0.9	3.8	1.6	19
截锥裂沟形010	FG170	1000FG170	500 314 170 006 010	1.0	4.1	1.6	19

Standard Burs

标准车针

截锥裂沟形012	FG171	1000FG171	500 314 170 006 012	1.2	4.1	1.6	19
截锥裂沟形016	FG172	1000FG172	500 314 170 006 016	1.6	4.6	1.6	19
截锥裂沟形010	FGSL170	1000FGSL170	500 316 170 006 010	1.0	4.1	1.6	25
截锥裂沟形012	FGSL171	1000FGSL171	500 316 170 006 012	1.2	4.1	1.6	25
截锥裂沟形016	FGSL172	1000FGSL172	500 316 170 006 016	1.6	4.6	1.6	25

高速截锥裂沟形 (H23L) High-speed Taper Flat End Fissure 5支/板 5pcs/pack							
型号规格 Model	美标型号规格 USModel	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
截锥裂沟形009	FGL169L	1000FGL169L	500 315 170 006 009	0.9	5.2	1.6	21
截锥裂沟形010	FGL170L	1000FGL170L	500 315 170 006 010	1.0	5.2	1.6	21
截锥裂沟形012	FGL171L	1000FGL171L	500 315 170 006 012	1.2	5.2	1.6	21
截锥裂沟形009	FGSL169L	1000FGSL169L	500 316 170 006 009	0.9	5.2	1.6	25
截锥裂沟形010	FGSL170L	1000FGSL170L	500 316 170 006 010	1.0	5.2	1.6	25
截锥裂沟形012	FGSL171L	1000FGSL171L	500 316 170 006 012	1.2	5.2	1.6	25

交叉锉纹圆柱形 (H21X) Cross-cut cylindrical 5支/板 5pcs/pack							
型号规格 Model	美标型号规格 USModel	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
交叉锉纹圆柱形010	FG57X	1000FG57X	500 314 109 019 010	1.0	4.2	1.6	19
交叉锉纹圆柱形012	FG58X	1000FG58X	500 314 109 019 012	1.2	4.2	1.6	19

Standard Burs

标准车针

低速弯机截锥裂沟形 (H23) Low-speed Right Angle Taper Cross Cut Fissure 5支/板 5pcs/pack							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
截锥裂沟形010	RA170	1010RA170	500 204 170 006 010	1.0	4.1	2.35	22
截锥裂沟形012	RA171	1010RA171	500 204 170 006 012	1.2	4.1	2.35	22
截锥裂沟形016	RA172	1010RA172	500 204 170 006 016	1.6	4.6	2.35	22

高速截锥裂沟形 (H33) High-speed Taper Flat End Fissure (带横切刃) Transverse Cutting Edge 5支/板 5pcs/pack							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
截锥裂沟形009	FG699	1000FG699	500 314 170 007 009	0.9	3.8	1.6	19
截锥裂沟形010	FG700	1000FG700	500 314 170 007 010	1.0	4.1	1.6	19
截锥裂沟形012	FG701	1000FG701	500 314 170 007 012	1.2	4.1	1.6	19
截锥裂沟形016	FG702	1000FG702	500 314 170 007 016	1.6	4.6	1.6	19
截锥裂沟形021	FG703	1010FG703	500 314 170 007 021	2.1	4.8	1.6	19
截锥裂沟形010	FGSL700	1000FGSL700	500 316 170 007 010	1.0	4.1	1.6	25
截锥裂沟形012	FGSL701	1000FGSL701	500 316 170 007 012	1.2	4.1	1.6	25
截锥裂沟形016	FGSL702	1000FGSL702	500 316 170 007 016	1.6	4.6	1.6	25
截锥裂沟形021	FGSL703	1010FGSL703	500 316 170 007 021	2.1	4.8	1.6	25

Standard Burs

标准车针

低速弯机截锥裂沟形 (H33) Low-speed Right Angle Taper Cross Cut Fissure (带横切刃) Transverse Cutting Edge 5支/板 5pcs/pack 							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
截锥裂沟形009	RA699	1010RA699	500 204 170 007 009	0.9	3.8	2.35	22
截锥裂沟形010	RA700	1010RA700	500 204 170 007 010	1.0	4.1	2.35	22
截锥裂沟形012	RA701	1010RA701	500 204 170 007 012	1.2	4.1	2.35	22
截锥裂沟形016	RA702	1010RA702	500 204 170 007 016	1.6	4.6	2.35	22
截锥裂沟形021	RA703	1010RA703	500 204 170 007 021	2.1	4.8	2.35	22
截锥裂沟形012	RASL701	1010RASL701	500 205 170 007 012	1.2	4.1	2.35	26
截锥裂沟形016	RASL702	1010RASL702	500 205 170 007 016	1.6	4.6	2.35	26
截锥裂沟形021	RASL703	1010RASL703	500 205 170 007 021	2.1	4.8	2.35	26

高速圆锥半球裂沟形 (H23R) High-speed Taper Round End Fissure 5支/板 5pcs/pack 							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
圆锥半球裂沟形009	FG1169	1000FG1169	500 314 196 006 009	0.9	3.8	1.6	19
圆锥半球裂沟形010	FG1170	1000FG1170	500 314 196 006 010	1.0	4.1	1.6	19
圆锥半球裂沟形012	FG1171	1000FG1171	500 314 196 006 012	1.2	4.1	1.6	19
圆锥半球裂沟形016	FG1172	1000FG1172	500 314 196 006 016	1.6	4.6	1.6	19

Standard Burs

标准车针

高速截锥裂沟形 (H33L) Low-speed Right Angle Taper Cross Cut Fissure (带横切刃) Transverse Cutting Edge 5支/板 5pcs/pack 							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
截锥裂沟形012	FGSL701L	1000FGSL701L	500 316 170 007 012	1.2	5.2	1.6	25
截锥裂沟形016	FGSL702L	1000FGSL702L	500 316 171 007 016	1.6	5.6	1.6	25

高速圆锥半球裂沟形 (H33R) High-speed Straight Round End Fissure (带横切刃) Transverse Cutting Edge 5支/板 5pcs/pack 							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
圆锥半球裂沟形012	FG1701	1000FG1701	500 314 196 007 012	1.2	4.1	1.6	19
圆锥半球裂沟形016	FG1702	1000FG1702	500 314 196 007 016	1.6	4.6	1.6	19
圆锥半球裂沟形012	FGSL1701	1000FGSL1701	500 316 196 007 012	1.2	4.1	1.6	25
圆锥半球裂沟形016	FGSL1702	1000FGSL1702	500 316 196 007 016	1.6	4.6	1.6	25

交叉锉纹锥形 (23X) Cross-cut tapered 5支/板 5pcs/pack 							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
交叉锉纹锥形010	FG170X	1000FG170X	500 314 170 019 010	1.0	4.2	1.6	19
交叉锉纹锥形012	FG171X	1000FG171X	500 314 170 019 012	1.2	4.2	1.6	19

Finishing Burs

修整车针

球形Round 5支/板 5pcs/pack 						
美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
FG7002	1005XFG7002	500 314 001 072 010	1.0	1.0	1.6	19
FG7003	1005XFG7003	500 314 001 072 012	1.2	1.2	1.6	19
FG7004	1005XFG7004	500 314 001 072 014	1.4	1.4	1.6	19
FG7005	1005XFG7005	500 314 001 072 016	1.6	1.6	1.6	19
FG7006	1015XFG7006	500 314 001 072 018	1.8	1.8	1.6	19
FG7007	1015XFG7007	500 314 001 072 021	2.1	2.1	1.6	19
FG7008	1015XFG7008	500 314 001 072 023	2.3	2.3	1.6	19
FG7009	1015XFG7009	500 314 001 072 025	2.5	2.5	1.6	19
FG8004	1005XFG8004	500 314 001 042 014	1.4	1.4	1.6	19
FG8006	1015XFG8006	500 314 001 042 018	1.8	1.8	1.6	19
FG8008	1015XFG8008	500 314 001 042 023	2.3	2.3	1.6	19
FG9004	1005XFG9004	500 314 001 032 014	1.4	1.4	1.6	19
FG9006	1015XFG9006	500 314 001 032 018	1.8	1.8	1.6	19
FG9008	1015XFG9008	500 314 001 032 023	2.3	2.3	1.6	19

Finishing Burs

修整车针

芽形bud shape 5支/板 5pcs/pack 						
美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
FG7103	1005XFG7103	500 314 254 072 012	1.2	3.3	1.6	19
FG7104	1005XFG7104	500 314 254 072 014	1.4	3.3	1.6	19
FG7106	1015XFG7106	500 314 254 072 018	1.8	4.0	1.6	19
FG7108	1015XFG7108	500 314 254 072 023	2.3	5.0	1.6	19

蛋形Egg 5支/板 5pcs/pack 						
美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
FG7404	1005XFG7404	500 314 499 072 014	1.4	3.0	1.6	19
FG7406	1015XFG7406	500 314 499 072 018	1.8	3.7	1.6	19
FG7408	1015XFG7408	500 314 499 072 023	2.3	4.2	1.6	19
FG8404	1005XFG8404	500 314 499 042 014	1.4	3.0	1.6	19
FG8406	1015XFG8406	500 314 499 042 018	1.8	3.7	1.6	19
FG8408	1015XFG8408	500 314 499 042 023	2.3	4.2	1.6	19

短火焰形 Short Flame 5支/板 5pcs/pack 							
美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length	
FG7901	1005XFG7901	500 314 496 072 009	0.9	4.0	1.6	19	
FG7902	1005XFG7902	500 314 496 072 010	1.0	4.0	1.6	19	
FG7903	1005XFG7903	500 314 496 072 012	1.2	4.5	1.6	19	
FG7904	1005XFG7904	500 314 496 072 014	1.4	5.0	1.6	19	
FG8901	1005XFG8901	500 314 496 042 009	0.9	4.0	1.6	19	
FG8902	1005XFG8902	500 314 496 042 010	1.0	4.0	1.6	19	
FG8903	1005XFG8903	500 314 496 042 012	1.2	4.5	1.6	19	
FG8904	1005XFG8904	500 314 496 042 014	1.4	5.0	1.6	19	
FG9903	1005XFG9903	500 314 496 032 012	1.2	4.5	1.6	19	


Dental Lab Carbide Burs


技工室钨钢车针

低速直柄截锥裂沟形 (H33) Low-speed Handpiece Taper Cross Cut Fissure 5支/板 5pcs/pack 							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
截锥裂沟形009	HP699	1010HP699	500 104 170 007 009	0.9	3.8	2.35	44.5
截锥裂沟形010	HP700	1010HP700	500 104 170 007 010	1.0	4.1	2.35	44.5
截锥裂沟形012	HP701	1010HP701	500 104 170 007 012	1.2	4.1	2.35	44.5
截锥裂沟形016	HP702	1010HP702	500 104 170 007 016	1.6	4.6	2.35	44.5
截锥裂沟形021	HP703	1010HP703	500 104 170 007 021	2.1	4.8	2.35	44.5

Dental Lab Carbide Burs

技工室钨钢车针

低速直柄圆柱裂沟形 (H31) Low-speed Handpiece Straight Cross Cut Fissure 5支/板 5pcs/pack 							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
圆柱裂沟形009	HP556	1010HP556	500 104 109 007 009	0.9	3.8	2.35	44.5
圆柱裂沟形010	HP557	1010HP557	500 104 109 007 010	1.0	4.1	2.35	44.5
圆柱裂沟形012	HP558	1010HP558	500 104 109 007 012	1.2	4.1	2.35	44.5
圆柱裂沟形014	HP559	1010HP559	500 104 109 007 014	1.4	4.5	2.35	44.5
圆柱裂沟形016	HP560	1010HP560	500 104 109 007 016	1.6	4.5	2.35	44.5
圆柱裂沟形018	HP561	1010HP561	500 104 109 007 018	1.8	4.8	2.35	44.5
圆柱裂沟形021	HP562	1010HP562	500 104 109 007 021	2.1	4.8	2.35	44.5

低速直柄截锥裂沟形 (H23) Low-speed Handpiece Taper Cross Cut Fissure 5支/板 5pcs/pack 							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
截锥裂沟形008	HP168	1010HP168	500 104 170 006 008	0.8	3.6	2.35	44.5
截锥裂沟形009	HP169	1010HP169	500 104 170 006 009	0.9	3.8	2.35	44.5
截锥裂沟形010	HP170	1010HP170	500 104 170 006 010	1.0	4.1	2.35	44.5
截锥裂沟形012	HP171	1010HP171	500 104 170 006 012	1.2	4.1	2.35	44.5
截锥裂沟形016	HP172	1010HP172	500 104 170 006 016	1.6	4.6	2.35	44.5
截锥裂沟形021	HP173	1010HP173	500 104 170 006 021	2.1	4.8	2.35	44.5

技工室钨钢车针

低速直柄球形 (H1) Low-speed Handpiece Round 5支/板 5pcs/pack							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
球形005	HP1/4	1010HP1/4	500 104 001 006 005	0.5	0.4	2.35	44.5
球形006	HP1/2	1010HP1/2	500 104 001 006 006	0.6	0.5	2.35	44.5
球形008	HP1	1010HP1	500 104 001 006 008	0.8	0.64	2.35	44.5
球形010	HP2	1010HP2	500 104 001 006 010	1.0	0.8	2.35	44.5
球形012	HP3	1010HP3	500 104 001 006 012	1.2	1.0	2.35	44.5
球形014	HP4	1010HP4	500 104 001 006 014	1.4	1.2	2.35	44.5
球形016	HP5	1010HP5	500 104 001 006 016	1.6	1.4	2.35	44.5
球形018	HP6	1010HP6	500 104 001 006 018	1.8	1.5	2.35	44.5
球形021	HP7	1010HP7	500 104 001 006 021	2.1	1.8	2.35	44.5
球形023	HP8	1010HP8	500 104 001 006 023	2.3	1.9	2.35	44.5

低速直柄圆柱半球裂沟形 (H21R) Low-speed Handpiece Round End Straight Cross Cut Fissure 5支/板 5pcs/pack							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
圆柱半球裂沟形010	HP1157	1010HP1157	500 104 139 006 010	1.0	4.1	2.35	44.5
圆柱半球裂沟形012	HP1158	1010HP1158	500 104 139 006 012	1.2	4.1	2.35	44.5

技工室钨钢车针

低速直柄圆柱裂沟形 (H21) Low-speed Handpiece Straight Cross Cut Fissure 5支/板 5pcs/pack							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
圆柱裂沟形009	HP56	1010HP56	500 104 109 006 009	0.9	3.8	2.35	44.5
圆柱裂沟形010	HP57	1010HP57	500 104 109 006 010	1.0	4.1	2.35	44.5
圆柱裂沟形012	HP58	1010HP58	500 104 109 006 012	1.2	4.1	2.35	44.5
圆柱裂沟形014	HP59	1010HP59	500 104 109 006 014	1.4	4.5	2.35	44.5
圆柱裂沟形016	HP60	1010HP60	500 104 109 006 016	1.6	4.5	2.35	44.5
圆柱裂沟形018	HP61	1010HP61	500 104 109 006 018	1.8	4.8	2.35	44.5
圆柱裂沟形021	HP62	1010HP62	500 104 109 006 021	2.1	4.8	2.35	44.5

低速直柄圆柱半球裂沟形 (H31R) Low-speed Handpiece Round End Straight Cross Cut Fissure 5支/板 5pcs/pack							
型号规格 Model	美标型号规格 US Model	订货号 Order No.	ISO No.	刃径 (mm) Head Diameter	刃长 (mm) Head Length	杆径 (mm) Shank Diameter	总长 (mm) Overall Length
圆柱半球裂沟形009	HP1556	1010HP1556	500 104 139 007 009	0.9	3.8	2.35	44.5
圆柱半球裂沟形010	HP1557	1010HP1557	500 104 139 007 010	1.0	4.1	2.35	44.5
圆柱半球裂沟形012	HP1558	1010HP1558	500 104 139 007 012	1.2	4.1	2.35	44.5
圆柱半球裂沟形014	HP1559	1010HP1559	500 104 139 007 014	1.4	4.5	2.35	44.5
圆柱半球裂沟形016	HP1560	1010HP1560	500 104 139 007 016	1.6	4.5	2.35	44.5

Carbide Cutters

钨钢磨头



Order-No货号	114MX023	144VFX023	144FX023	187VFX023	001MX060
ISO No. (500 104)	114 190 023	144 110 023	144 140 023	187 110 023	001 190 060
刃径 (mm) Head diameter	2.3	2.3	2.3	2.3	6.0
刃长 (mm) Head length	14	14	14	14.5	5.2
总长 (mm) Overall length	44.5	44.5	44.5	44.5	49.5



Order-No货号	200VFX040	200FX040	200MX040	200FX045	200MX045
ISO No. (500 104)	200 110 040	200 140 040	200 190 040	200 140 045	200 190 045
刃径 (mm) Head diameter	4.0	4.0	4.0	4.5	4.5
刃长 (mm) Head length	13	13	13	13	13
总长 (mm) Overall length	51	51	51	51	51

Carbide Cutters

钨钢磨头



Order-No货号	200FX060	200MX060	257FX060	257MX060
ISO No. (500 104)	200 140 060	200 190 060	257 140 060	257 190 060
刃径 (mm) Head diameter	6.0	6.0	6.0	6.0
刃长 (mm) Head length	13	13	13	13
总长 (mm) Overall length	51	51	51	51



Order-No货号	275FX060	275M060	275MX060	275CX060
ISO No. (500 104)	275 140 060	275 175 060	275 190 060	275 220 060
刃径 (mm) Head diameter	6.0	6.0	6.0	6.0
刃长 (mm) Head length	14	14	14	14
总长 (mm) Overall length	52	52	52	52